

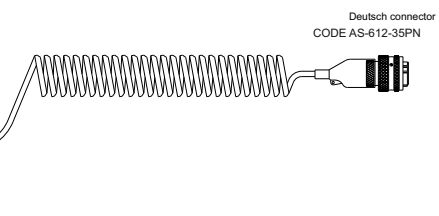
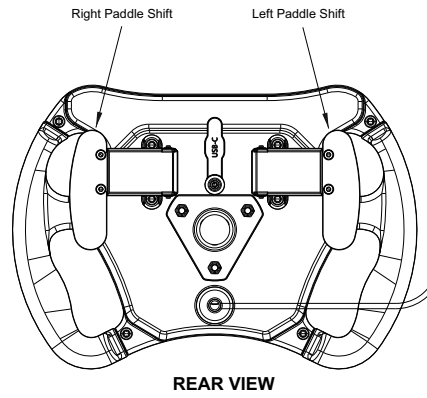





# SW4 270 (MY26) - CONNECTIONS DIAGRAM

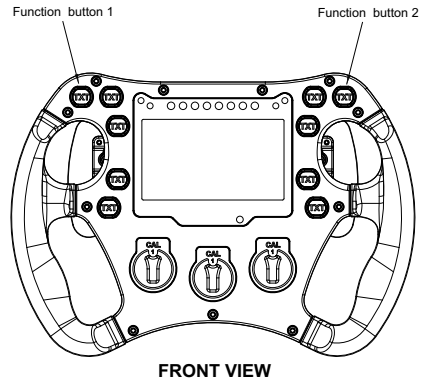

22 pins male deutsch connector  
CODE AS-612-35PN  
External view



PIN	SIGNAL
1	9-15V Power in
2	CAN ECU+
3	CAN ECU-
4	Paddle sh Left
5	Paddle sh Right
6	Paddle sh COM
7	Function button 2
8	CAN 2+
9	CAN 2-
10	Function button 1
11	NC
12	NC
13	CAN AIM+
14	GND
15	CAN AIM -
16	RPM
17	NC
18	Function button 2
19	GND
20	Function button 1
21	+Vbext CAN
22	+Vbout CAN

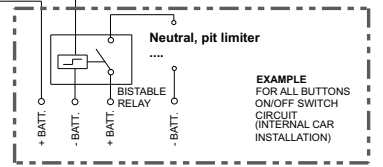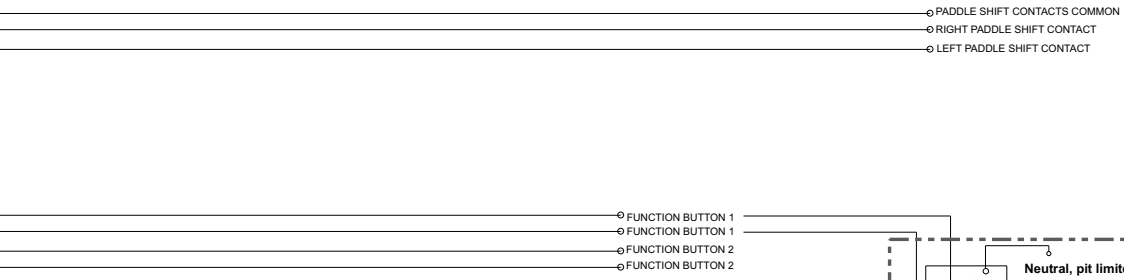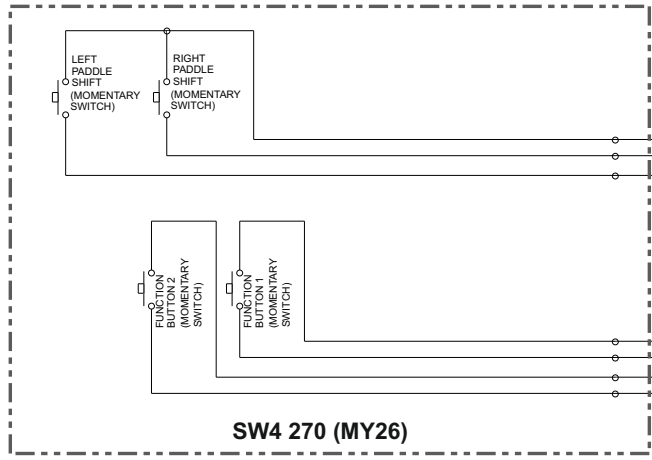

**IMPORTANT:  
MAX 300mA  
PER WIRE**