




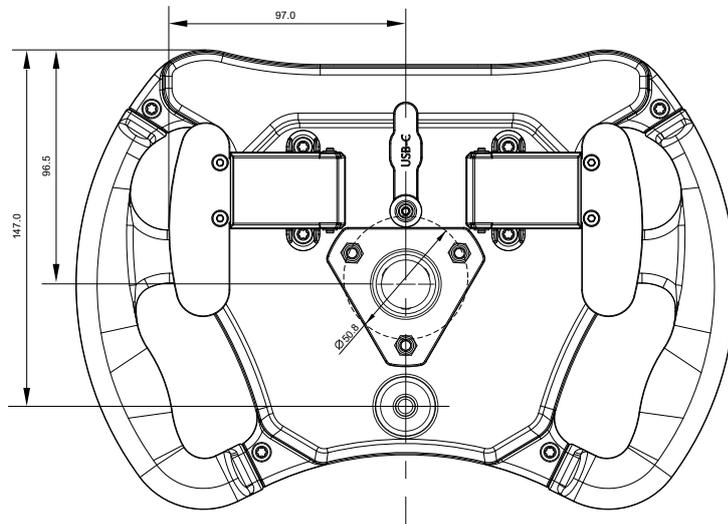

AiM SW4 270 (MY26) Steering Wheel

with coiled cable and 22 pins Autosport connector

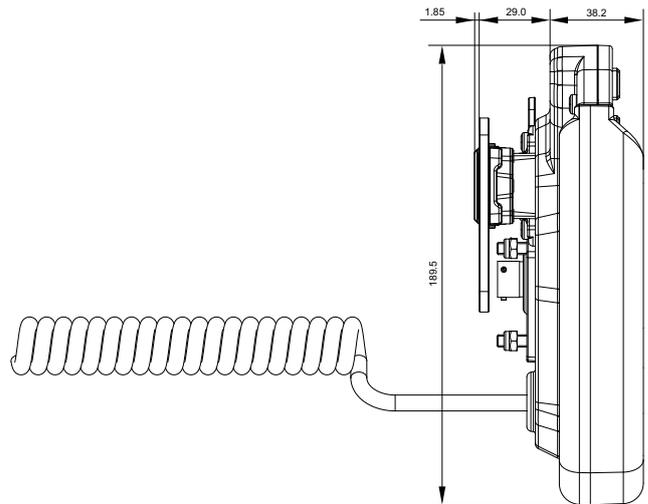

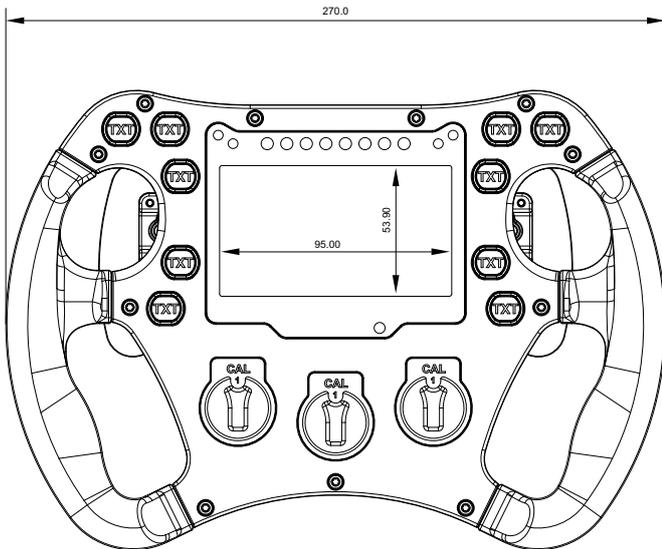

AiM SW4 270 (MY26) Steering Wheel

with coiled cable and 22 pins Autosport connector

Technical specifications


Display	4.3" TFT
Resolution	800x480 pixels
Contrast	800:1
Brightness	800 cd/m2 - 1,100 Lumen
Ambient light sensor	Yes
Alarm display icons	Yes, freely configurable
Shift Lights	8 configurable RGB LEDs
Alarm LEDs	4 configurable RGB LEDs
CAN connections	3
ECU connection	CAN
ECU compatibility	2,000+ industry leading ECUs
Expansion CAN connection	GPS09c, LCU Series, ACC3, SmartyCam 3 Series, RIO02, Shift Light Module, Memory Module
Internal memory	4 GB
Body	Carbon fibre-reinforced resin and forged metal
Pushbuttons	10 pushbuttons + 3 rotary switches (all with RGB backlights)
Connectors	1 Autosport 22 pins male connector + 1 USB-C connector
Dimensions	270.0 x 189.5 x 38.2 mm
Weight	1,500 g
Power consumption	500 mA
Waterproof	IP65




AiM SW4 270 (MY26) Steering Wheel

with coiled cable and 22 pins Autosport connector

Pinout

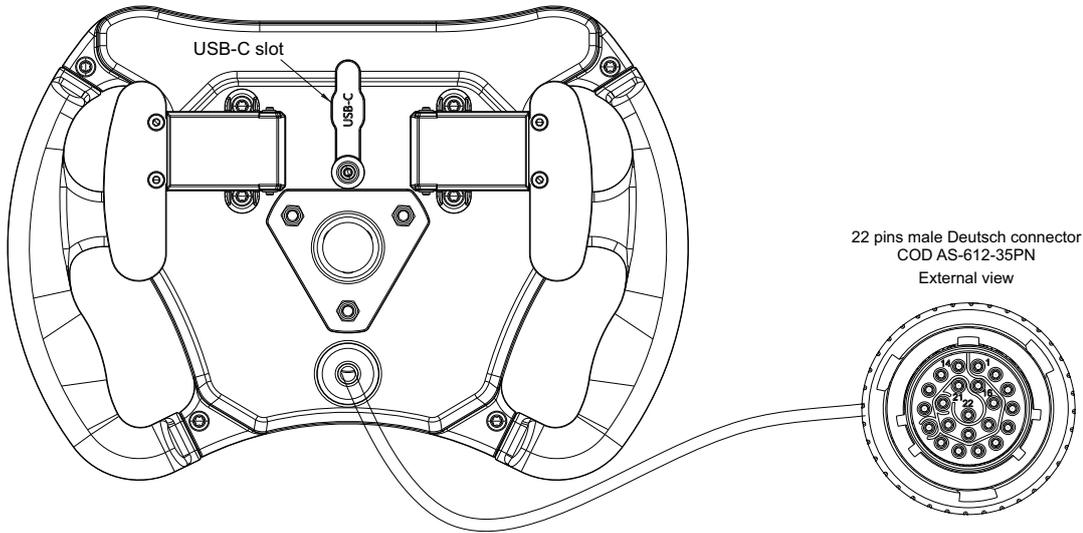

PIN	SIGNAL
1	9-15V Power in
2	CAN ECU+
3	CAN ECU-
4	Paddle sh Left
5	Paddle sh Right
6	Paddle sh COM
7	Function button 2
8	CAN 2+
9	CAN 2-
10	Function button 1
11	NC
12	NC
13	CAN AIM+
14	GND
15	CAN AIM -
16	RPM
17	NC
18	Function button 2
19	GND
20	Function button 1
21	+Vbext CAN
22	+Vbout CAN

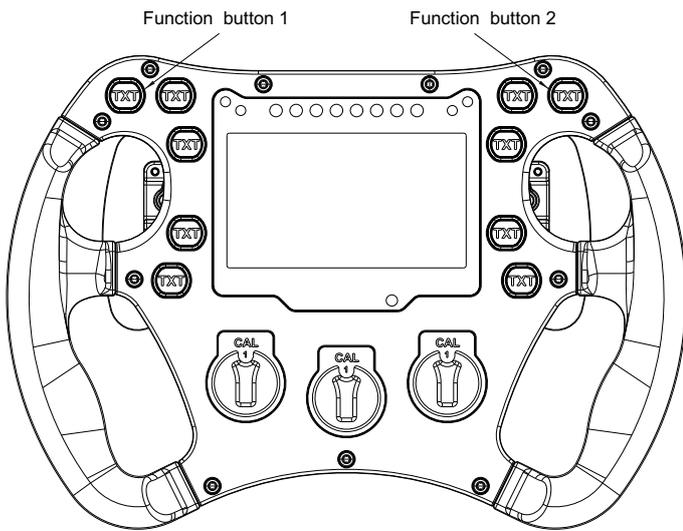

All other push buttons and all rotary switches on CAN BUS